

# GEM



## CP-15\GE CALL POINT




-The Emergency Door Release, with the contact from N/C to N/O. the main function is to override the electrical locking/release devices in case of emergency. With Key to replace glass or reset unit.

### Specifications:

Dimensions:88x88x52mm  
Contact Resistance: 150m  
Switch rated: 3A@125VAC

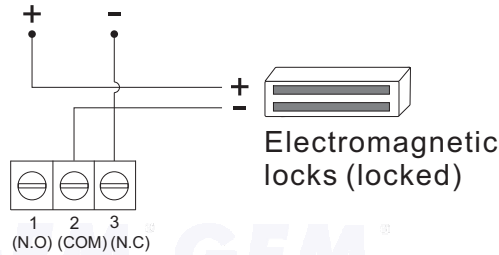

Electromagnetic locks (locked)

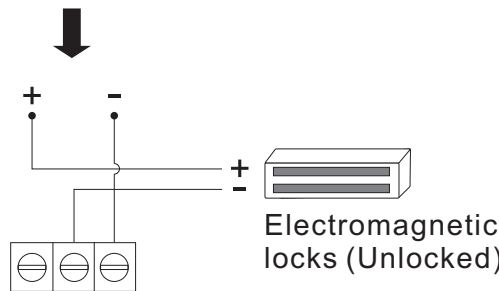

Electromagnetic locks (Unlocked)

No need to power in. It has a switch for motoring in case of emergency when glass is broken; the contacts change from N/C to N/O.

# GEM


## CP-15\GE CALL POINT




-The Emergency Door Release, with the contact from N/C to N/O. the main function is to override the electrical locking/release devices in case of emergency. With Key to replace glass or reset unit.

### Specifications:

Dimensions:88x88x52mm  
Contact Resistance: 150m  
Switch rated: 3A@125VAC

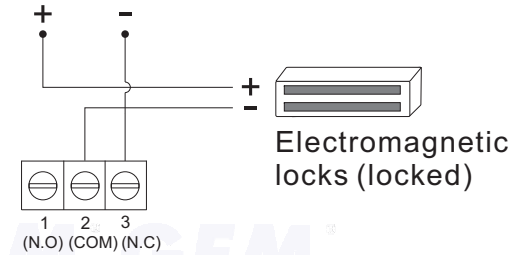

Electromagnetic locks (locked)

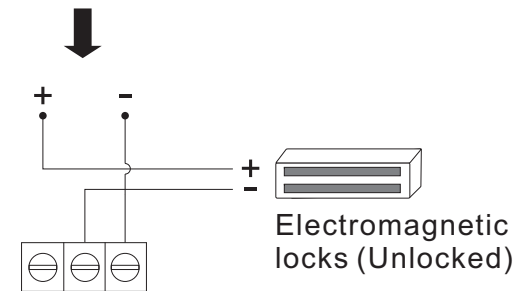

Electromagnetic locks (Unlocked)

No need to power in. It has a switch for motoring in case of emergency when glass is broken; the contacts change from N/C to N/O.